




VALVULA DE ASIEN TO RECTO

GLOBE VALVE STRAIGHT TYPE

NORMAS DIN

FIG. VS 101
SERIE PN-16

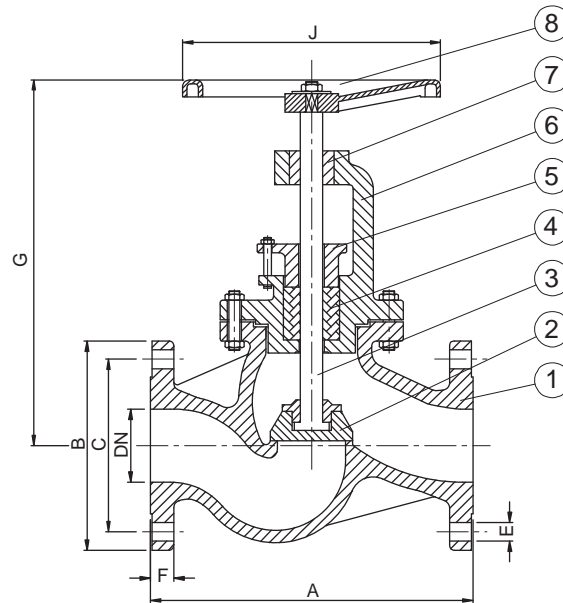

Nº	DENOMINACIÓN / PART	MATERIAL
1	CUERPO / BODY	INOX CF8M
2	CIERRE / DISC	INOX CF8M
3	HUSILLO / STEM	INOX 316
4	EMPAQUETADURA / GLANDPACKING	Graphite-PTFE
5	PRENSA / GLAND	INOX CF8M
6	TAPA / BONNET	INOX CF8M
7	TUERCA / NUT	BRONZE
8	VOLANTE / HANDWHEEL	CAST IRON GG25

Otros materiales / dimensiones consultar
Others materials / dimensions on request

VALVULA DE ASIEN TO RECTO

- Tapa puente atornillada.
- Husillo y volante ascendentes.
- Cierre en acero inoxidable o PTFE.
- Bridas barrenadas y dimensionadas, s/n DIN serie PN-16.
- Distancia entre caras s/n DIN 3202 F-1.
- Pasos de 15 a 250 mm.

GLOBE VALVE

- Bolted yoke bonnet.
- Rising stem and handwheel.
- Stainless steel or PTFE sealings.
- Drilled and dimensioned flanged, according to DIN PN-16.
- Distance between sides according to DIN 3202 F-1.
- Sizes from 15 to 250 mm.

CUADRO DE DIMENSIONES NORMAS DIN
DIMENSIONS PANEL

DN	15	20	25	32	40	50	65	80	100	125	150	200	250
A	130	150	160	180	200	230	290	310	350	400	480	600	730
B	95	105	115	140	150	165	185	200	220	250	285	340	405
C	65	75	85	100	110	125	145	160	180	210	240	295	350
F	14	16	16	16	18	18	18	20	20	22	22	24	26
E	14	14	14	18	18	18	18	18	18	18	23	23	23
N*	4	4	4	4	4	4	4	8	8	8	8	8/12	8/12
G	200	210	225	235	250	265	320	345	395	450	490	545	755
J	125	125	125	150	160	160	200	200	250	320	380	450	500
Peso (kg) Weight (kg)	5	6	8	10	12	17	23	27	44	68	101	175	276

* N° de agujeros / N° of holes